



Product Data Sheet - Hazardous Area Brass Reducers and Adaptors

Product description:

SWA brass adaptors and reducers provide an effective method of connection between dissimilar thread types (Metric, PG, ET, NPT or BSP) or sizes in hazardous areas.


Technical details:

Design	
Body material	Brass BS 2874:1985 CZ121
Ingress Protection	IP 6,7
Operating Temperature	60°C to +125°C
Thread types	Metric, PG (Panzer Gewinde), Imperial (ET), National Pipe thread (NPT), British Standard Pipe (BSP)
Approvals	
Protection class	II2 GD Ex db IIC Gb / Ex e IIC Gb Ex tb IIIC Db
ATEX Certificate No	Reducer TI17ATEX825X / Adaptor TI21ATEX1121X




Brass Reducer

Brass Adaptor



ATEX

Ordering details:

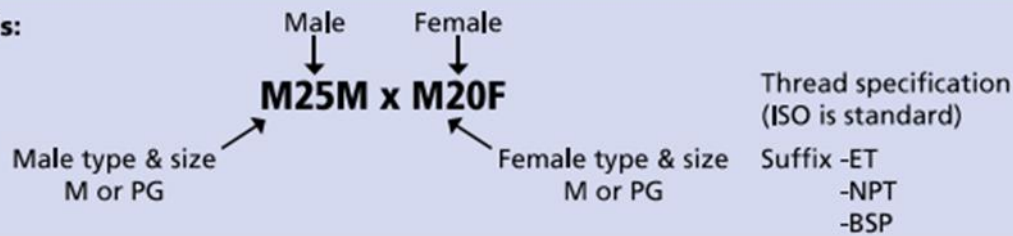

Dimension Chart

SHAPE "A" ADAPTOR DIMENSIONS
 SHAPE "R" REDUCER DIMENSIONS

