

# Cable glands & accessories

## ALT Cable Glands

### ALT BW Range


#### 2 PART INDOOR

**Application:** Brass indoor gland suitable for all types of steel wire armoured cable (SWA), providing mechanical cable retention and electrical continuity via armour wire termination.

**Continuous operating temp:** PVC: -20°C to +130°C  
LSF: -20°C to +130°C

**Ingress protection:** IP2X

**Approval:** BS 6121 Part 1:2005

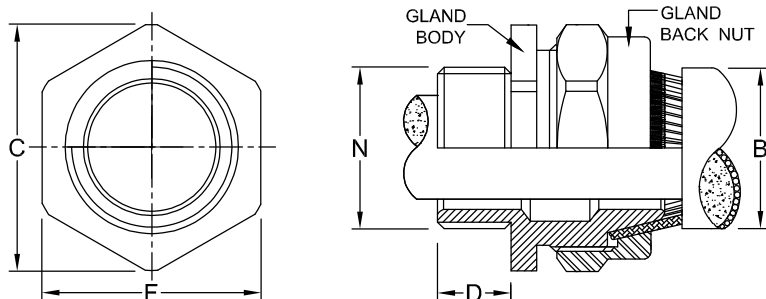

Part No.	Pack Quantity	Entry Thread		Cable Acceptance Details			Hexagonal Details	
		Diameter N	Length D	Diameter B min	Diameter B max	Armour wire size T	A/F F	A/C C
<b>BW20S* PACK-ALT</b>	2	20 x 1.5	10	11.8	15.8	0.90/1.25	22.0	24.4
<b>BW20* PACK-ALT</b>	2	20 x 1.5	10	13.8	19.5	0.90/1.25	25.0	27.7
<b>BW25* PACK-ALT</b>	2	25 x 1.5	10	19.8	27.0	1.25/1.60	33.0	36.6
<b>BW32* PACK-ALT</b>	2	32 x 1.5	10	26.4	33.5	1.60/2.00	40.0	44.4
<b>BW40* PACK-ALT</b>	1	40 x 1.5	15	32.4	40.1	1.60/2.00	48.0	53.3
<b>BW50S* PACK-ALT</b>	1	50 x 1.5	15	37.8	48.0	2.00/2.50	58.0	65.0
<b>BW50* PACK-ALT</b>	1	50 x 1.5	15	44.0	52.6	2.00/2.50	62.5	69.4
<b>BW63S* PACK-ALT</b>	1	63 x 1.5	15	50.5	60.5	2.50	70.0	77.0
<b>BW63* PACK-ALT</b>	1	63 x 1.5	15	56.2	65.5	2.50	76.0	84.4
<b>BW75S* PACK-ALT</b>	1	75 x 1.5	15	62.0	71.6	2.50	85.0	94.4
<b>BW75* PACK-ALT</b>	1	75 x 1.5	15	67.5	78.5	2.50/3.15	90.5	99.0
<b>BW90* PACK-ALT</b>	1	90 x 1.5	20	80.0	93.0	3.15	112.0	125.0

All dimensions are in mm.

Pack content: Gland(s), steel locknut(s), earth tag(s) and shroud(s).

Packs are also available with Low-smoke LSF shroud.

\*Add LSF to the Part No. for Low Smoke & Fume version, i.e. **BW20SLSF PACK-ALT**

See page 60 for more information on Earthing Nuts™

