

BWL Premier Range Brass Cable Gland Pack


3 PART INDOOR

Application: Brass indoor gland suitable for all types of steel wire armoured cable (SWA), providing mechanical cable retention and electrical continuity via armour wire termination and additional armour locking ring.

Continuous operating temp: PVC: -20°C to +130°C
LSF: -20°C to +130°C

Ingress protection: IP2X

Approval: Conforms to BS 6121 Part 1:2005

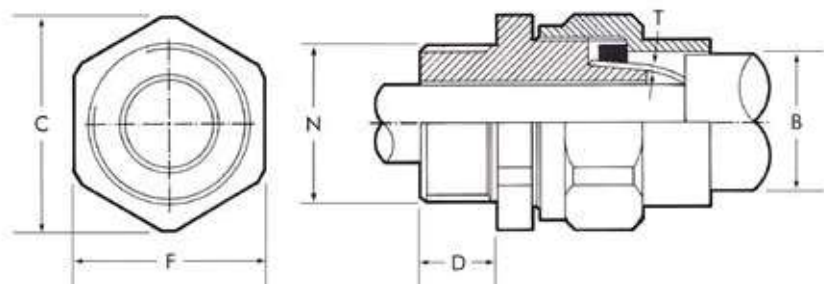

Part No.	Pack Quantity	Entry Thread		Cable Acceptance Details		Hexagonal Details	
		Diameter N	Length D	Diameter B min max	Armour wire size T	A/F F	A/C C
BWL20S* PACK	2	20 x 1.5	10	12.9 - 15.8	0.90/1.25	24.8	27.0
BWL20* PACK	2	20 x 1.5	10	15.5 - 20.8	0.90/1.25	30.0	34.4
BWL25* PACK	2	25 x 1.5	10	20.3 - 27.5	1.25/1.60	36.0	40.0
BWL32* PACK	2	32 x 1.5	10	26.7 - 33.5	1.60/2.00	46.0	51.0
BWL40* PACK	1	40 x 1.5	15	33.0 - 40.9	1.60/2.00	55.0	61.0
BWL50* PACK	1	50 x 1.5	15	45.7 - 52.6	2.00/2.50	65.0	70.5
BWL63* PACK	1	63 x 1.5	15	58.4 - 65.3	2.50	80.0	87.9
BWL75* PACK	1	75 x 1.5	20	71.0 - 78.0	2.50	95.0	105.4

BWL Long Thread Versions

BWL20SLT* PACK	2	20 x 1.5	12	12.9 - 15.8	0.90/1.25	24.8	27.0
BWL20LT* PACK	2	20 x 1.5	12	15.5 - 20.8	0.90/1.25	30.0	34.4
BWL25SLT* PACK	2	25 x 1.5	12.5	17.8 - 25.0	1.25/1.60	32.0	35.5
BWL25LT* PACK	2	25 x 1.5	12.5	20.3 - 27.5	1.25/1.60	36.0	40.0
BWL32LT* PACK	2	32 x 1.5	12.5	26.7 - 33.5	1.60/2.00	46.0	51.0
BWL40SLT* PACK	1	40 x 1.5	17	27.0 - 35.3	1.60/2.00	50.0	54.0
BWL40LT* PACK	1	40 x 1.5	17	33.0 - 40.9	1.60/2.00	55.0	61.0
BWL50SLT* PACK	1	50 x 1.5	17	39.4 - 46.3	2.00/2.50	60.85	66.8
BWL50LT* PACK	1	50 x 1.5	17	45.7 - 52.6	2.00/2.50	65.0	70.5
BWL63SLT* PACK	1	63 x 1.5	17	52.1 - 61.5	2.50	74.7	83.9
BWL63LT* PACK	1	63 x 1.5	17	58.4 - 65.3	2.50	80.0	87.9
BWL75SLT* PACK	1	75 x 1.5	22	64.8 - 73.0	2.50	90.0	99.0
BWL75LT* PACK	1	75 x 1.5	22	71.0 - 78.0	2.50	95.0	105.4

All dimensions are in mm.

Pack content: Gland(s), steel locknut(s), earth tag(s) and PVC shroud(s).

Packs are also available with Low-smoke LSF shroud.

*Add LSF to the Part No. for Low Smoke & Fume version, i.e. **BWL20SLSF PACK**