

Earthing components and accessories

Earthing Protection

Earth Bars and Disconnecting Links

Bar: 50mm x 6mm hard drawn copper bar, having 99.9% purity

Base: uPVC

Fitting: M10 hexagon head screws

Tested to: IEC 62561-1:2018

Part No.	Description	Length (mm)	Width (mm)	Total Height (mm)
IBRI	Insulated black round insulator c/w M10 hexagonal head nuts	-	-	-
EBDL	Disconnecting Link	125	90	90
EB-4	Four way earth bar	300	90	90
EB4-S	Four way earth bar with single disconnecting link	475	90	90
EB6-S	Six way earth bar with single disconnecting link	475	90	96
EB6-T	Six way earth bar with twin disconnecting link	550	90	96
EB-6	Six way earth bar	400	90	90
EB8-S	Eight way earth bar with single disconnecting link	575	90	96
EB8-T	Eight way earth bar with twin disconnecting link	650	90	96
EB10-S	Ten way earth bar with single disconnecting link	725	90	96
EB10-T	Ten way earth bar with twin disconnecting link	800	90	96
EB12-S	Twelve way earth bar with single disconnecting link	825	90	96
EB12-T	Twelve way earth bar with twin disconnecting link	900	90	96

N.B. Other combinations available on request.



IBRI



EBDL



Earth Bar



Earth Bar – Single (S-type)




Earth Bar – Twin (T-type)

Earth Plate – Lattice Copper

Part No.	Size (mm)
ELC600-3	600 x 600 x 3
ELC900-3	900 x 900 x 3

Can be used as an alternative to an earth rod.

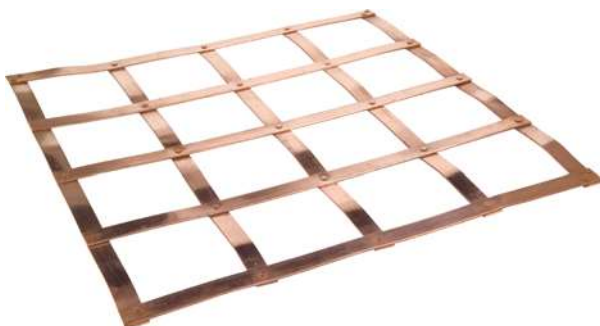

To see a video explaining techniques and best practice scan the QR code

