

Spiral Wrap Binding and Cable Jacketing

Spiral Wrap Binding

Material: Polyethylene (PE).

Application: An easy and economical way of bundling cables and harnesses and providing harness breakouts. Wrap clockwise to apply.


Features: Flexible and easy to install. Durable, abrasion resistant, reusable with retained spiral strength – won't change shape after second usage.

Temp range: -30°C to +80°C

Flammability: UL94HB



Part No.	Dimensions in mm			Coil Size (m)
	Internal Dia. E	External Dia. D	Bundle Dia.	
SP2B-10 (Black only)	2.3	3.5	2-15	10
SP4*-10	5.0	6	4 - 50	10
SP6*-10	7.0	8	6 - 60	10
SP9*-10	10.2	12	9 - 65	10
SP12*-10	13.0	15	12 - 70	10
SP15*-10	16.4	19	15 - 100	10
SP20*-10	21.0	24	20 - 130	10

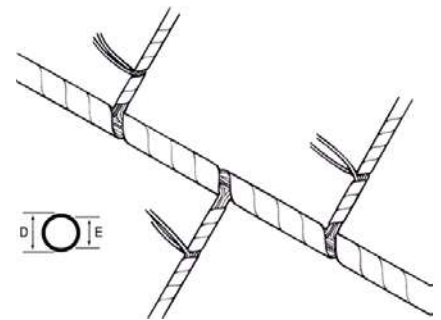

*Add suffix to part no. to denote colour required: **N** – natural, **B** – black

Expandable 'Push-back' Cable Jacketing

- Ideal product to support and protect cable harnesses
- Offers superb flexibility
- Available in black or grey

Fumes toxicity: Passes CEI 754-1 and CEI 754-2 Halogen free

Fumes opacity: Passes NF C 20452 (Polymer)

Chemical resistance: Unaffected by most chemicals



Part No.	Size (mm)		Coil Size (m)
	Normal	Expanded	
PBJ5*-100	5	10	100
PBJ10*-100	10	18	100
PBJ12*-50	12	20	50
PBJ15*-50	15	25	50
PBJ20*-25	20	38	25
PBJ25*-25	25	46	25
PBJ30*-25	30	55	25
PBJ40*-25	40	75	25

Properties

Monofilament: Polyester – size 0.22mm

Melting point: +250°C

Limiting oxygen index: 34%

Operating temp: -50°C to +150°C

Flame resistance: Passes flame requirement of CEI 332-1 and FMVSS 302 (Type A) 12 according to NF F 16-101

*Suffix part number **BLK** (black) or **GRY** (grey).