Earthing components and accessories


Earthing Accessories

Terminal Kit Box - EK1016

Terminal kit box complete with hand ratchet crimp tool and a selection of 10mm² & 16mm² copper tube



4 Way and 8 Way Earth Terminal Blocks

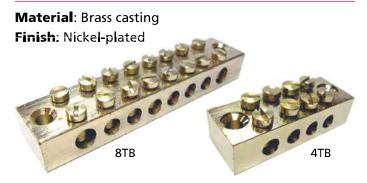

Part No.	Cable Entry Hole Diameters	Length (mm)	Width (mm)
4TB	1 x 6.5mm 3 x 5.5mm	54	19
8TB	2 x 6.5mm 6 x 5.5mm	88	19

Earth Clamp Set

Ideal for radiators, sink units, ducting and display units.

Easy to install, versatile, safe and reliable.

For metal thickness: 2.5 - 6.0mm

1 Allen Key

Packs comprise of: 10 clamps 10 nylon cable ties 10 safety labels

Part No. **Pack Quantity** ECS-10 10

Braided Earth Straps and Lead Assemblies



Braided earth straps & lead assemblies made to order to suit all requirements or to your specifications.

When placing an enquiry, please supply details of:

- Cross sectional area of cable or braid (inc. voltage or amp rating)
- Terminals or stud hole dimensions required.
- Required hole centre to hole centre dimensions.
- Any special requirements such as restricted palm width for terminals.
- Supplied with BS EN 61238-1:2003 TQ lugs.

Flexible Flat Tinned Copper Earthing Braid

Part No.	Current Rating Amps	Nominal CSA mm²	Nominal Dimensions mm	Reel Qty (m)
BRDPL30	30	1.7	4 x 0.75	50
BRDPL60	63	7.5	10 x 1.5	50
BRDPL100	90	10	14 x 1.5	50
BRDPL125	125	16	19 x 2.0	50
BRDPL200	200	35	25 x 3.5	50
BRDPL60-INS	63	7.5	10 x 1.5	50
BRDPL100-INS	90	10	14 x 1.5	50

N.B. INS denotes 'Insulated' (please state required colour).

Typical uses

- Earthing connections
- Power interconnection
- Lightning protection



Available by the metre.

